



Low pass filter

MODEL : LPF-11030

Features

- Application to FM band
- High power rating up to 300W
- Low insertion loss
- High grade PCB
- ATC 100B chip capacitor
- Aluminum enclose
- Easy to use
- Low cost




General Specifications:

Power rating 300 Watts
Input impedance 50 ohm
Output impedance 50 ohm
Input connector N type male
Output connector N type male
Insertion loss 0.25 dB (typical)
Harmonic filter >45 dB (175 MHz)

Physical and Environmental Specifications

General Low pass filter
Operating Temperature -10°C to +60°C
Storage Temperature -10°C to +60°C

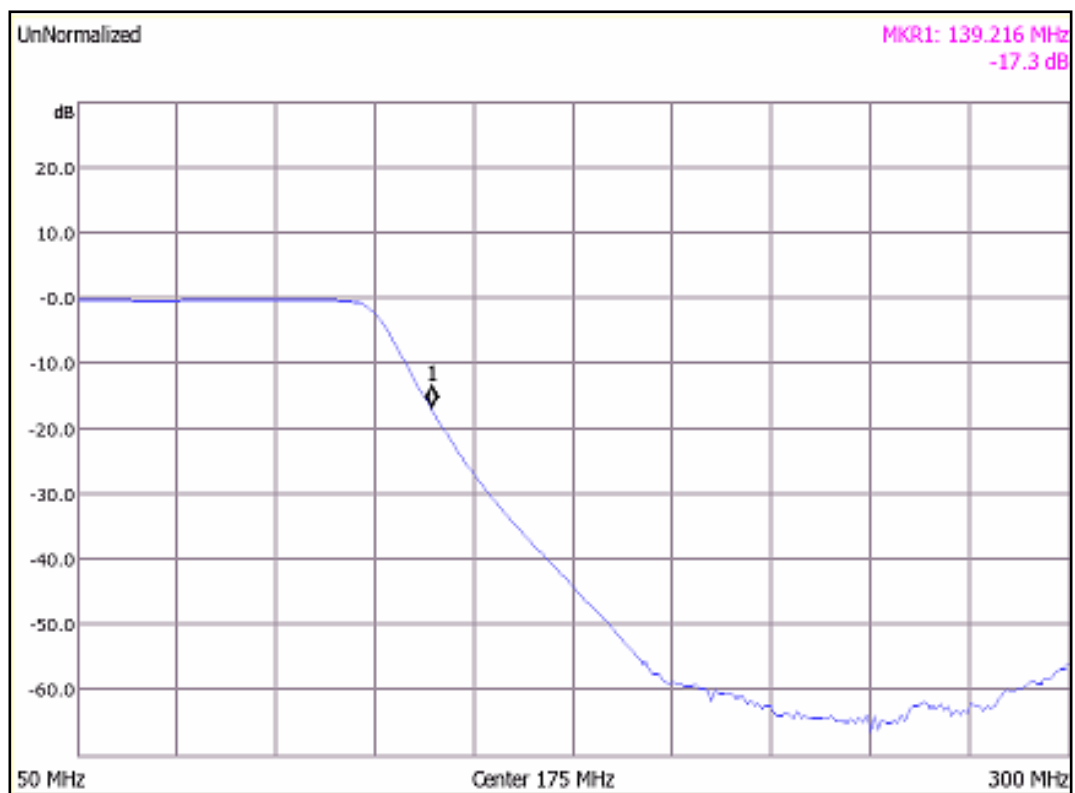

RF Application Co.,Ltd.

120/2 Soi Ramkhamhaeng52, Ramkhamhaeng Rd.,Huamak, Bangkok Bangkok Thailand
Tel: +662 732 3319 Fax: +662 732 2290 e-mail: sale@rf.co.th www.rf.co.th