


Stereo Encoder (STE-10011)

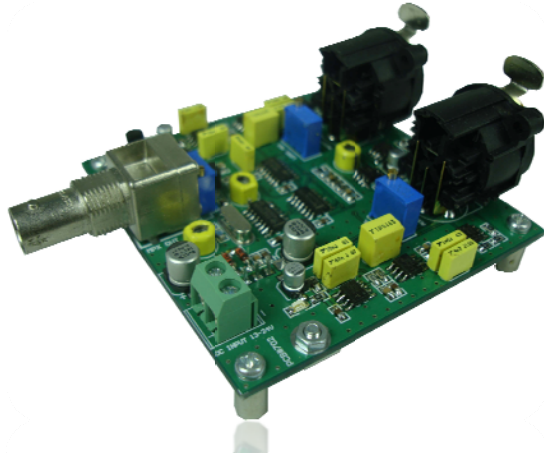

Features

- Build in 15KHz filter
- Unbalanced audio input
- Level adjustable
- Low noise Op amp
- Modulation signal output
- Low cost

General Specifications:

Audio frequency response	: 10Hz – 15KHz
Audio input impedance	: 10KHz
Audio input level	: -6dB to +6dB adjustable
Audio input connector	: XLR Female
Pilot	: 19KHz
Pre emphasis	: 50 us
Channel separation	: >40dB
MPX output connector	: BNC female

Physical and Environmental Specifications:

General	: Stereo Encoder
Operating Temperature	: -10°C to +50°C (+14°F to +122°F)
Storage Temperature	: -40°C to +80°C (-40°F to +176°F)
DC input requirement	: 13-18VDC@0.1A
Size	: 8.0 X 11.04 X 4.5 cm. (W x H x D)
Weight	: 0.1 Kg.